

# 1.27mm(.050") Wire To Board Connector





Shenzhen Hongru Connector Co., Ltd

## SPECIFICATIONS:

- Current Rating:1AAC,DC
- Voltage Rating:100V AC,DC
- Operating Temperature:-40℃~+105℃
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:500V AC/minute
- Wire Size:AWG#28
- SMT CONNECTOR
- MATERIAL
- Housing: PA46(red) UL94V-0
- Male Contact:Phosphor bronze
- Finish:Tin Over nickel plated

Email:yukyli@hrb-connector.com  
 Tel: 086(0755)27096669  
 Skype: haiyuncheng-vivian  
 Mobile(whatsapp): 086-186 8112 3590  
 Website: http://www.hrb-connector.com

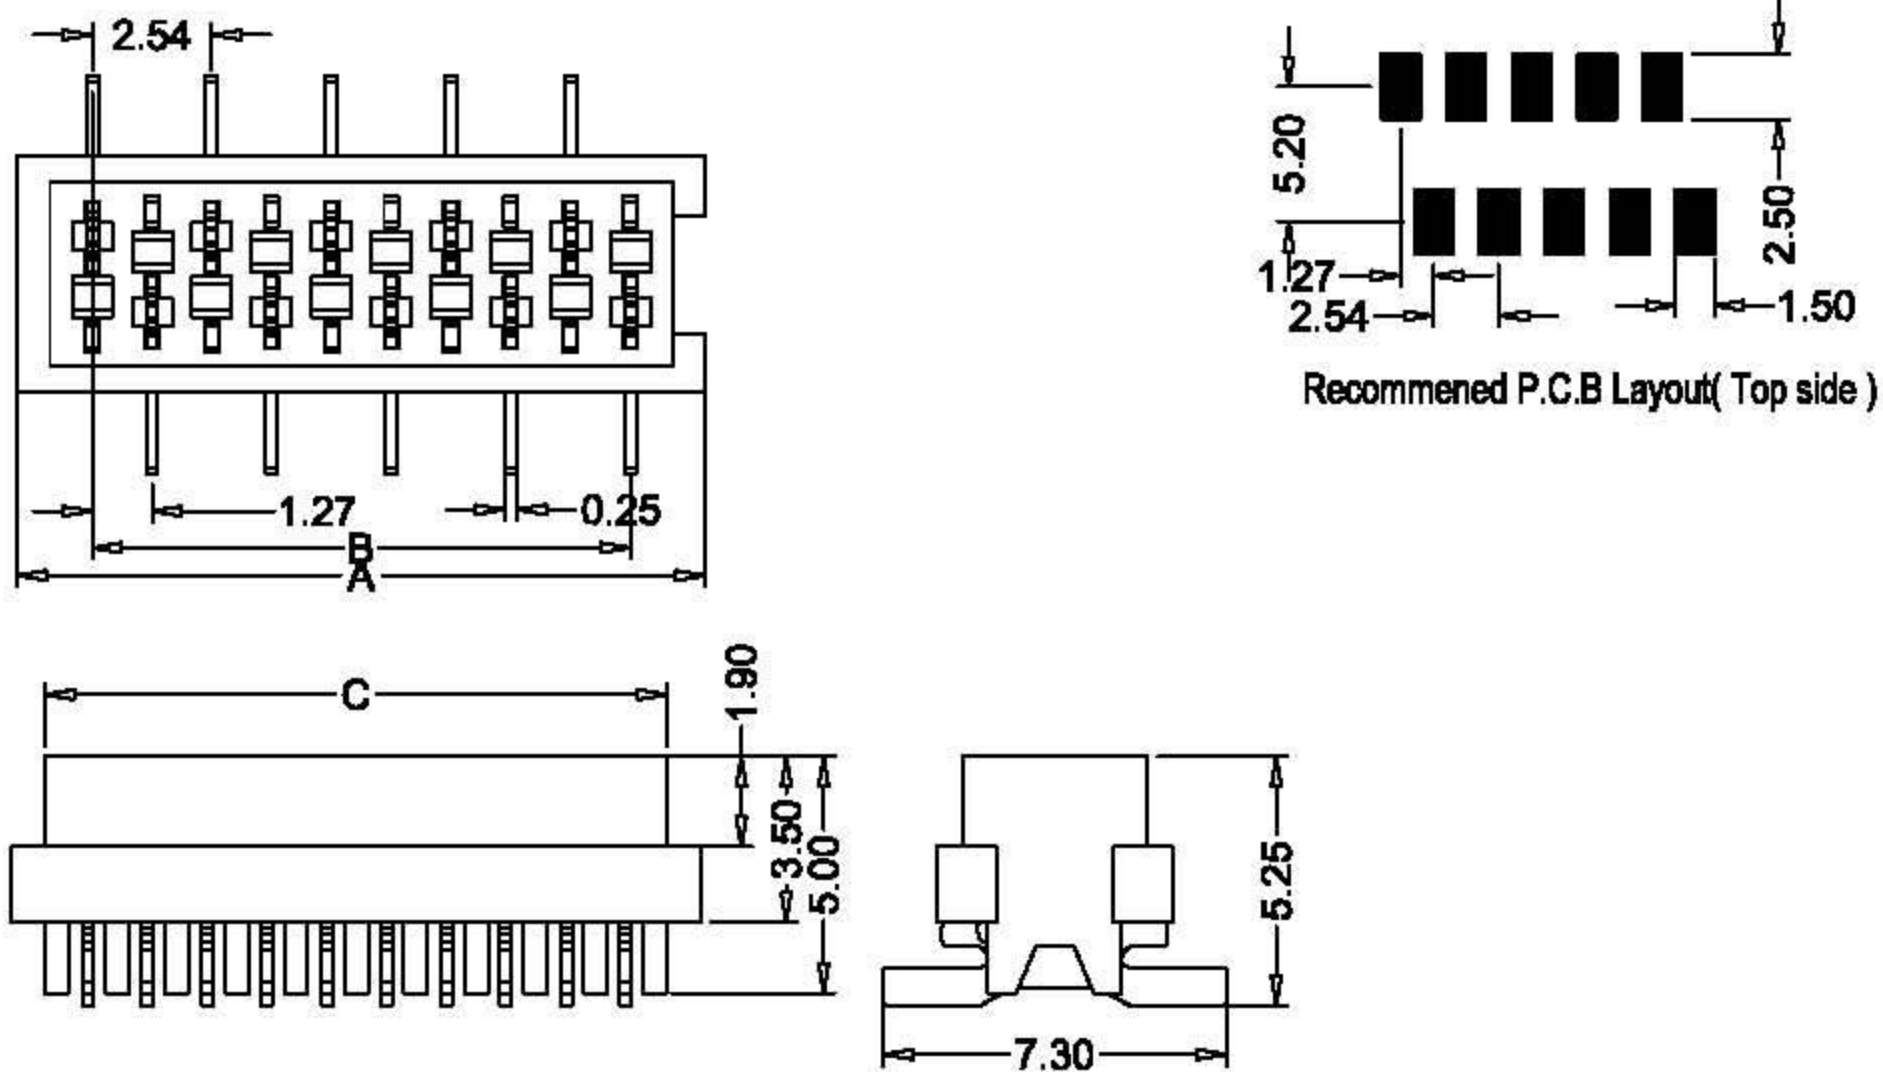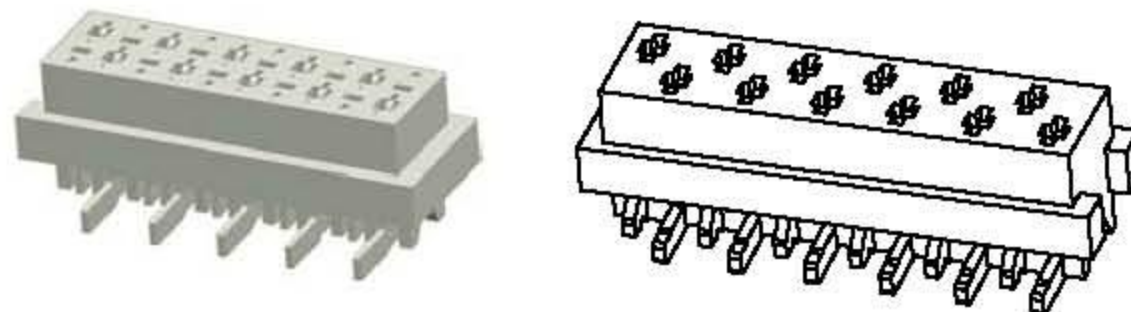

## Ordering Information And Dimensions

Part NO.		Dimensions			Part NO.		Dimensions		
TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C	TYP UL94V-0	Circuits	Dim:A	Dim:B	Dim:C
M25482-2x2	4	7.00	3.81	5.60	M25482-2x8	16	22.24	19.05	20.84
M25482-2x3	6	9.54	6.35	8.14	M25482-2x9	18	24.78	21.59	23.38
M25482-2x4	8	12.08	8.89	10.68	M25482-2x10	20	27.32	24.13	25.92
M25482-2x5	10	14.62	11.43	13.22	M25482-2x11	22	29.86	26.67	28.46
M25482-2x6	12	17.16	13.97	15.76	M25482-2x12	24	32.40	29.21	31.00
M25482-2x7	14	19.70	16.51	18.30					

