

# 1.27mm(.050") Wire To Board Connector





Connector & Terminal

Shenzhen Hongru Connector Co., Ltd

**SPECIFICATIONS:**

- Current Rating:1AAC,DC
- Voltage Rating:100V AC,DC
- Operating Temperature:-40℃~+105℃
- Contact Resistance:10mΩ max.
- Insulation Resistance:1000MΩ Min.
- Withstanding Voltage:500V AC/minute
- Wire size:AWG#28
- Paddle board connector
- MATERIAL
- Housing: PA46(red) UL94V-0
- Male Contact:Phosphor bronze
- Finish:Tin Over nickel plated

Email:yukyli@hrb-connector.com  
 Tel: 086(0755)27096669  
 Skype: haiyuncheng-vivian  
 Mobile(whatsapp): 086-186 8112 3590  
 Website: <http://www.hrb-connector.com>

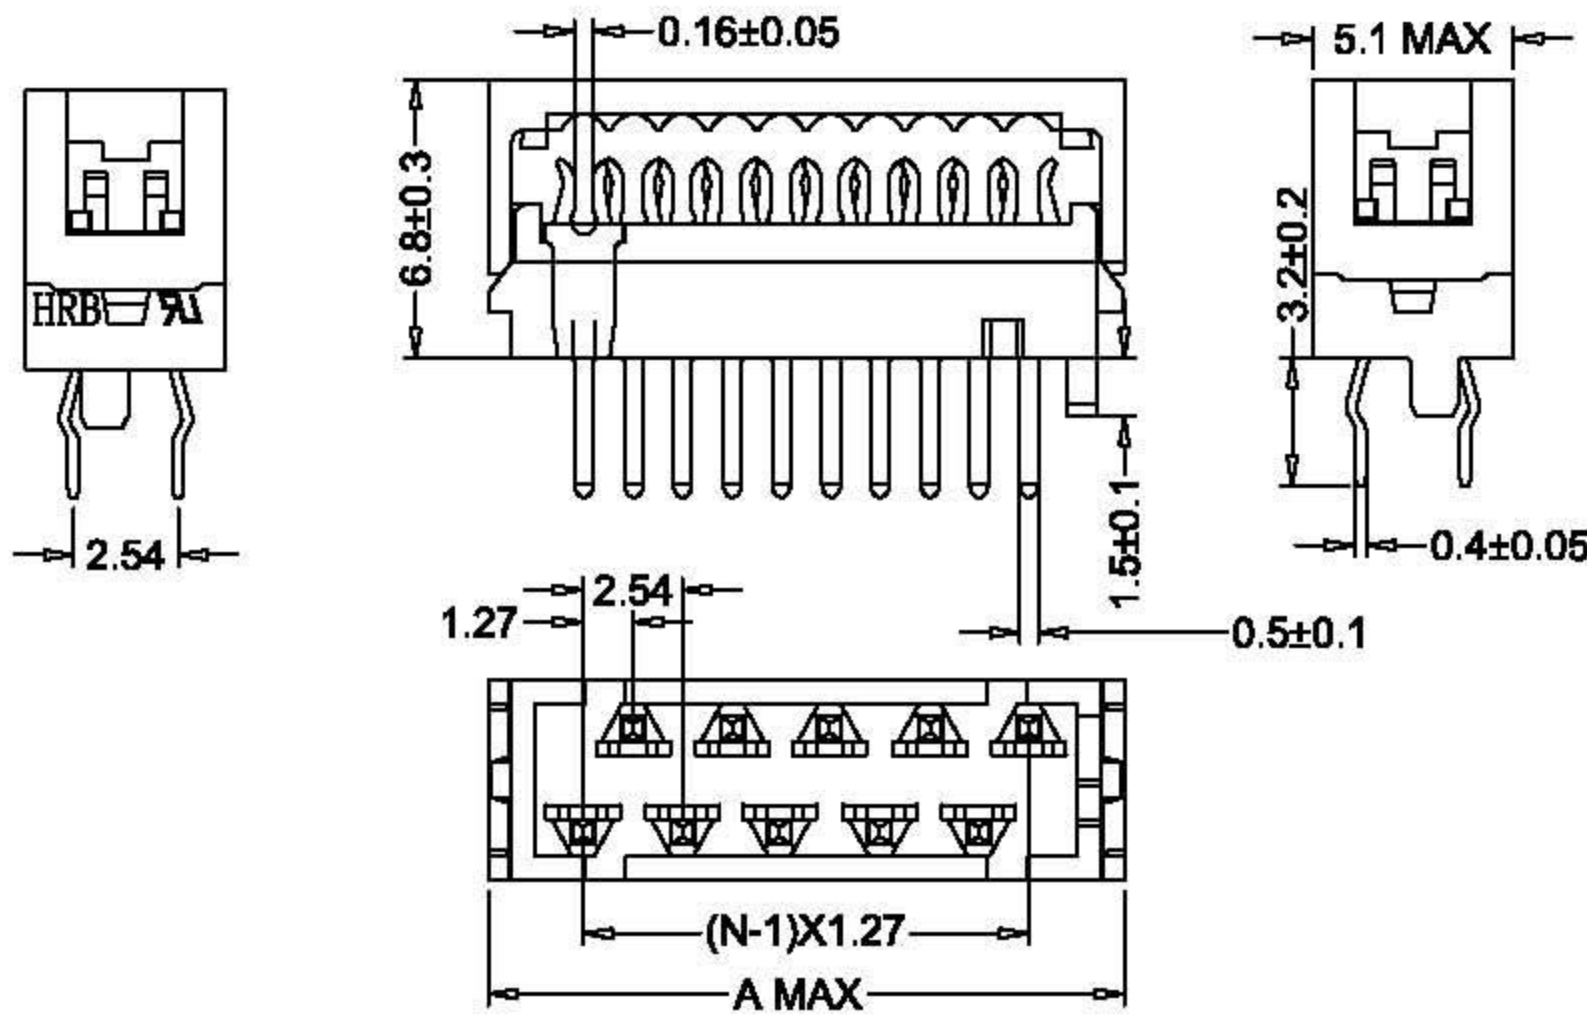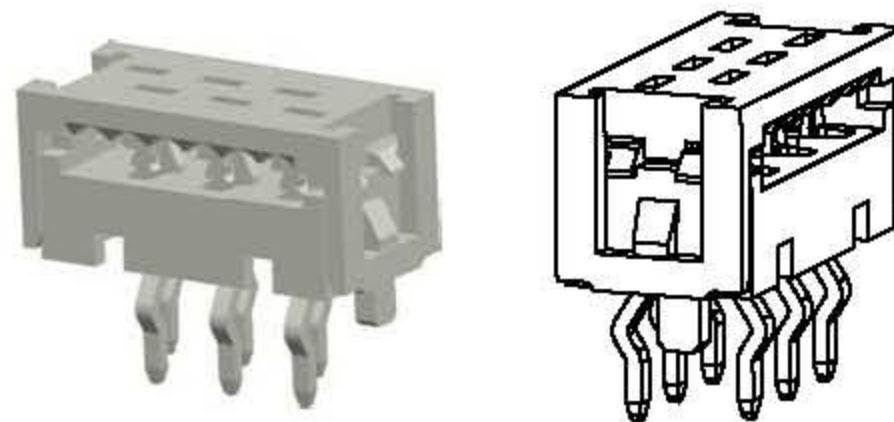

**Ordering Information And Dimensions**

Part NO.		Dimensions	Part NO.		Dimensions
TYP UL94V-0	Circuits	Dim:A MAX	TYP UL94V-0	Circuits	Dim:A MAX
M2548-2x2(P)	4	8.60	M2548-2x8(P)	16	23.80
M2548-2x3(P)	6	11.10	M2548-2x9(P)	18	26.30
M2548-2x4(P)	8	13.60	M2548-2x10(P)	20	28.90
M2548-2x5(P)	10	16.20	M2548-2x11(P)	22	31.40
M2548-2x6(P)	12	18.70	M2548-2x12(P)	24	34.00
M2548-2x7(P)	14	21.30			

