






M5001

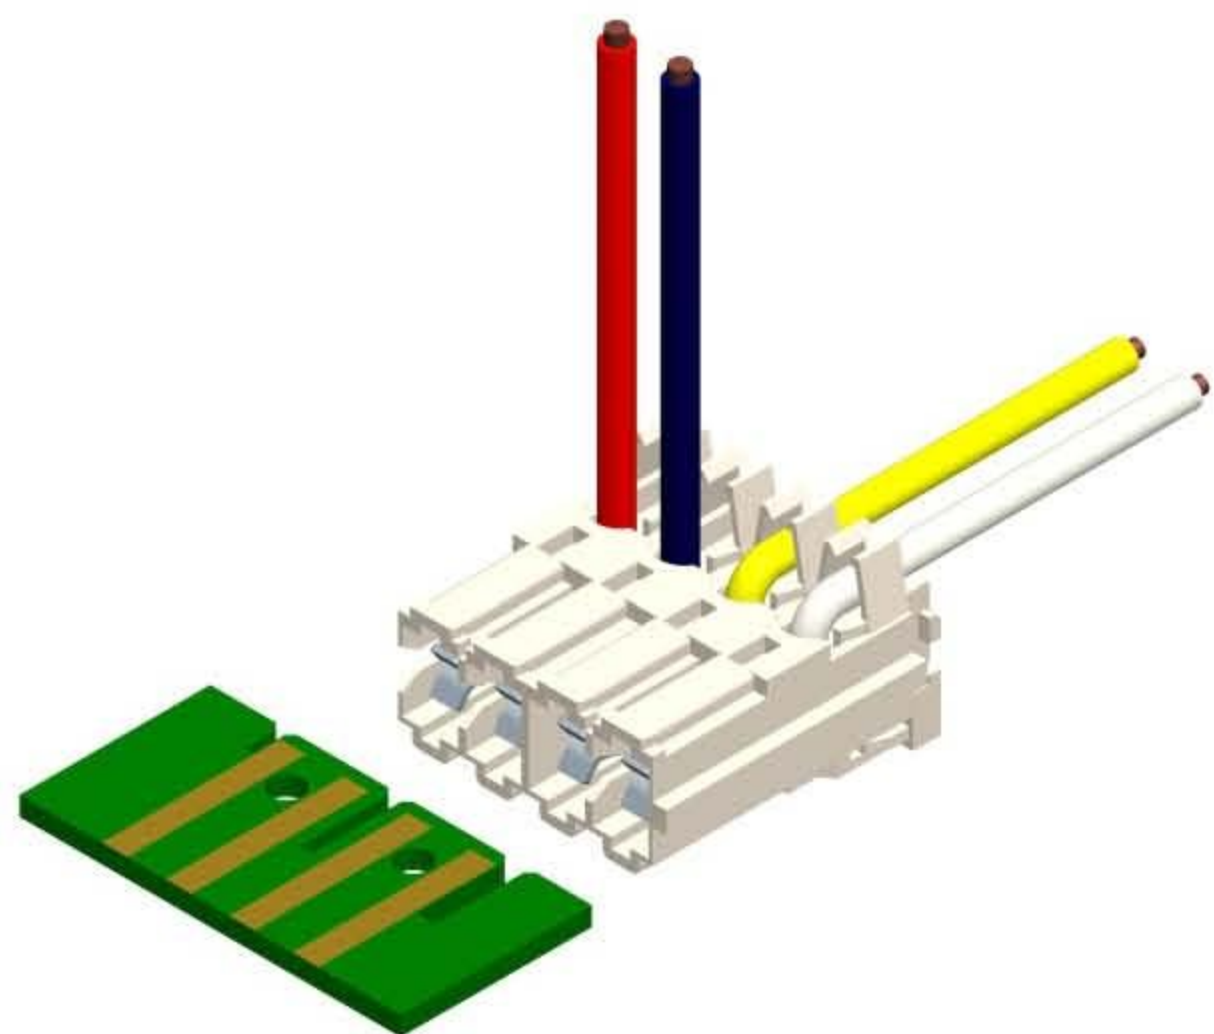


SPECIFICATION



Current rating: 3AAC, DC AWG20
 6AAC, DC AWG18
 Voltage rating: 220V AC, DC
 Operating Temperature: -25°C--+105°C
 Contact Resistance: 5mΩ max.
 Insulation resistance: 1000MΩ min.
 Withstanding voltage: 1500V AC/minute
 Material: Housing: Nylon66 UL94V-0
 Terminal: Brass, Tin-plated
 Wire range: AWG 20 to 18
 GWT: 750°C IEC-60335-1

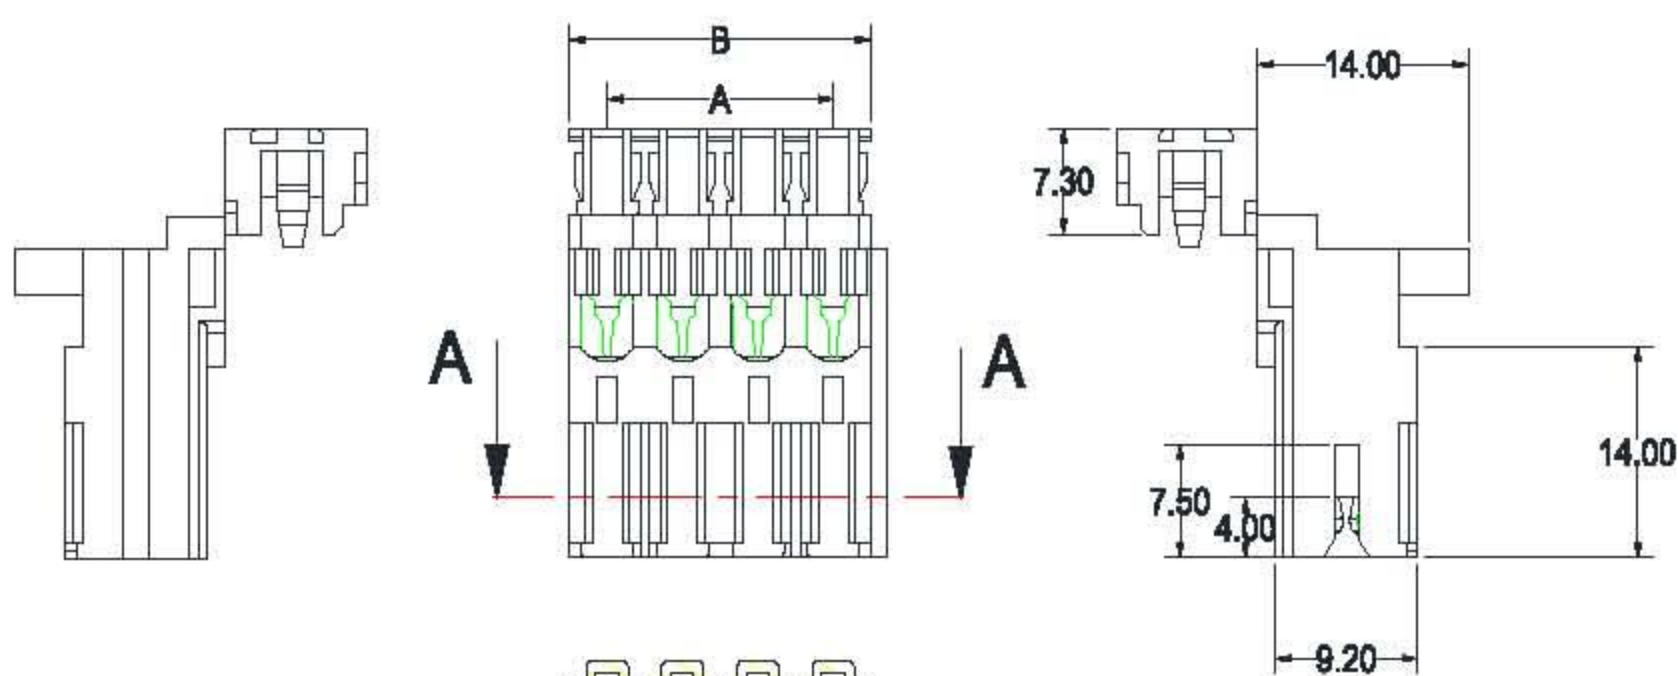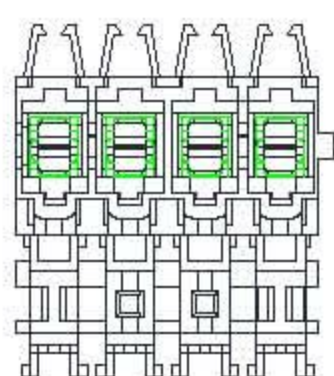

Section: A-A

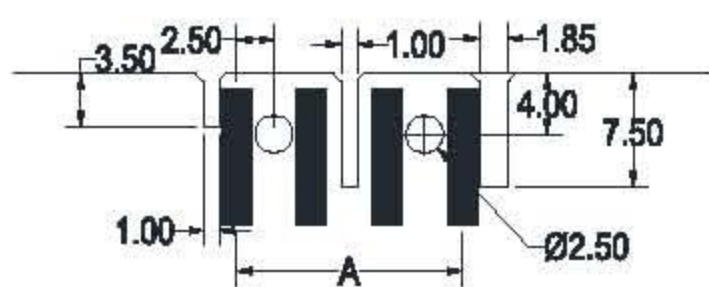

Dimension		
Pos.No.	A	B
2	10	15
3	15	20
4	20	25
5	25	30
6	30	35
7	35	40
8	40	45
9	45	50
10	50	55
11	55	60
12	60	65

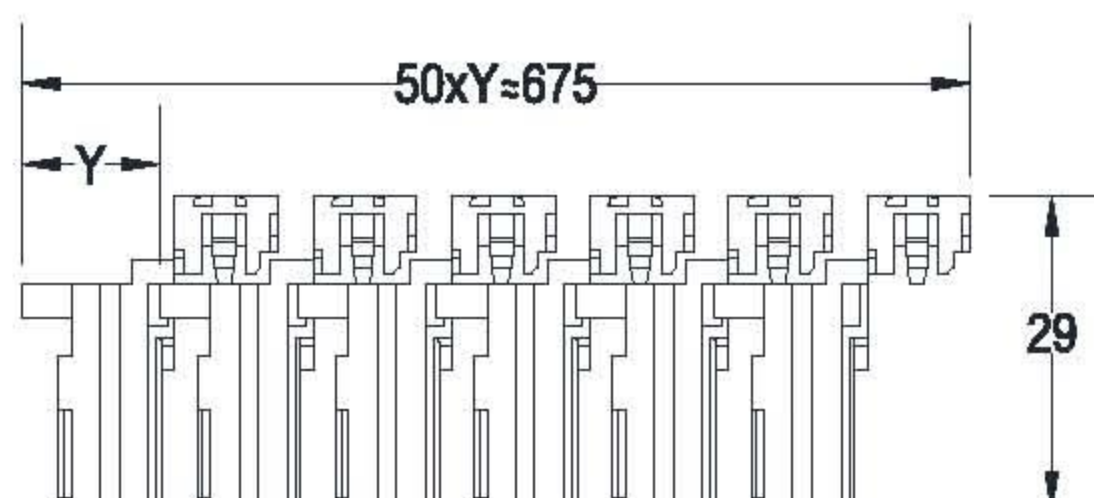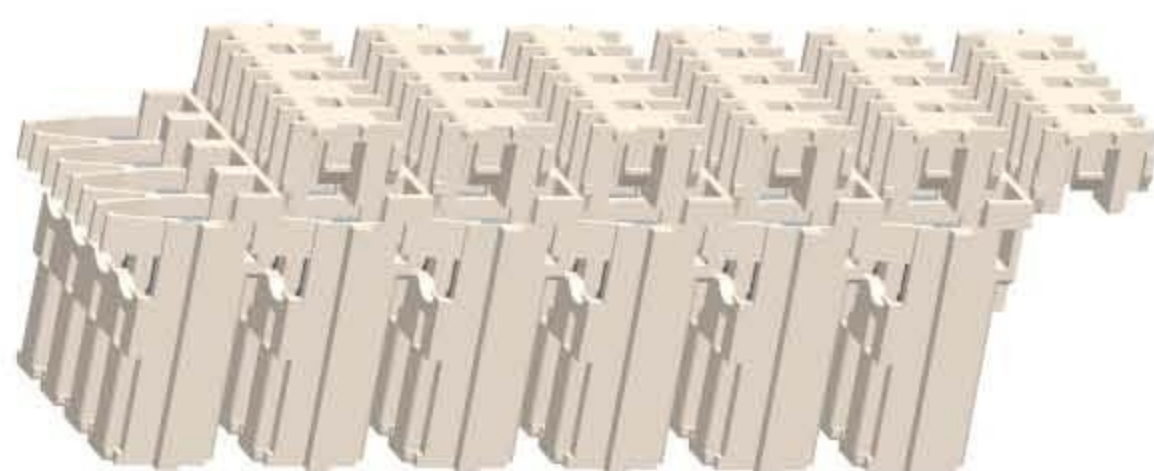

M5001 Part Number Definition

M5001-X-XXX

